

Asian Journal of Research in Agriculture and Forestry

4(1): 1-15, 2019; Article no.AJRAF.50478

ISSN: 2581-7418

Evaluating Efficiency of Sampling Schemes in Tropical Natural Forests: Review and Simulation Experience from Kenya

Joseph Hitimana^{1,2*}, James Legilisho Ole Kiyiapi¹ and Balozi Kirongo Bekuta¹

¹Department of Forestry and Wood Science, School of Natural Resource Management, University of Eldoret, Eldoret, Kenya.

²School of Natural Resource and Environmental Management, University of Kabianga, Kericho, Kenya.

Authors' contributions

This work was carried out in collaboration among all authors. Author JH designed the study, performed the statistical analysis, wrote the protocol and wrote the first draft of the manuscript. Authors JLOK and BKB edited the manuscript. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/AJRAF/2019/v4i130051

Editor(s):

(1) Dr. Christine Wulandari, Head of Forestry Graduate Program, University of Lampung, Indonesia.

Reviewers:

(1) Atilla Akbaba, İzmir Katip Celebi University, Turkey.

(2) Junir Antonio Lutinski, Universidade Federal De Santa Maria – UFSM, Brazil.

Complete Peer review History: http://www.sdiarticle3.com/review-history/50478

Original Research Article

Received 22 May 2019 Accepted 04 August 2019 Published 08 August 2019

ABSTRACT

Forest measurements, especially in natural forests are cumbersome and complex. 100% enumeration is costly and inefficient. This study sought to find out reliable, efficient and cost-effective sampling schemes for use in tropical rain forest (TRF), moist montane forest (MMF) and dry woodland forest (DWF) in Kenya. Forty-eight sampling schemes (each combining sampling intensity (5, 10, 20, 30%), plot size (25, 50, 100, 400 m²) and sampling technique (simple random sampling, systematic sampling along North-South and along East-West orientations) were generated for testing estimates of forest attributes such as regeneration through simulation using R-software. Sampling error and effort were used to measure efficiency of each sampling scheme in relation to actual values. Though forest sites differed in biophysical characteristics, cost of sampling increased with decreasing plot size regardless of the forest type and attribute. Accuracy of inventory increased with decreasing plot size. Plot sizes that captured inherent variability were 5mx5m for regeneration and trees ha⁻¹ across forest types but varied between forest types for basal

area. Different sampling schemes were ranked for relative efficiency through simulation techniques, using regeneration as an example. In many instances systematic sampling-based sampling schemes were most effective. Sub-sampling in one-hectare forest unit gave reliable results in TRF (e.g. SSV-5mx5m-30%) and DWF (e.g. SSV-10mx10m-30%) but not in MMF (5mx5m-100%). One-hectare-complete-inventory method was found inevitable for regeneration assessment in montane forest.

Keywords: Forest measurement; optimum plot size; inventory protocol; regeneration assessment.

1. INTRODUCTION

Assessments of tropical natural forests are often constrained by lack of sampling protocols of known reliability. Different plot sizes, sampling intensities, sampling techniques have been applied in mixed tropical forests with no indication of the efficiency or quality of methods used. Existing single-level sampling designs commonly applied in forestry include spatial random or systematic distribution of sampling units [e.g.1,2]. However, systematic sampling is the most practiced due to logistical advantages over random sampling, despite some statistical weaknesses [1,2,3,4]. In practice, it is advised to randomize the starting plot and apply systematic distribution of the others [1,2,3]. Multistage sampling techniques, stratification and cluster sampling are known to increase efficiency in forest inventory [3.5]. Past studies suggest that a plot size of one hectare is a suitable as a sampling unit [e.g., 3]. Smaller plots have been adopted in some forest vegetation studies [e.g. 6,7,8,9]. In vegetation studies, fewer but larger plots are documented to perform better than many but small plots; but there is always need to strike a balance between the cost and precision or accuracy when fixing the required sampling intensity [6]. Although subdividing any forest estate into 1-ha-inventory units is a common and agreeable practice, this study was designed to explore whether or not there could be any opportunity to sub-sample this standard unit to reduce the cost of inventory, and at the same time, achieve statistically similar or higher accuracy of estimates on-per-hectare basis.

This paper reports findings on evaluation of efficiency of sampling schemes in tropical natural forests based on data from typical tropical forests and woodlands in Kenya, simulated sampling designs to capture such data and existing literature. The study was conceived based on the premises that: (i) Forest assessment studies are complex in the context of tropical mixed natural forests and in the wake of changing roles of

forests and tree resources due to dynamic socioecological and economic situations; (ii) there are many research initiatives undertaken in forest resources assessment, but studies on efficiency and harmonization of sampling methodologies in forestry are rare; (iii) natural forests and woodlands are today recognized as critical assets for livelihoods sustenance for many people, biodiversity conservation, economic development and climate moderation for which quality information is mandatory in order to guide strategic and management plans; however, there is lack of scientifically tested and locally adapted tools to be used in generating the much needed knowledge for those complex and diverse ecosystems; and (iv) based on the existing knowledge in forest sampling techniques, on past practices in forest assessments as well as the current computer technologies, research on efficiency of sampling schemes (accuracy, precision and cost) is achievable. A research was designed seeking to fill the aforementioned gaps by seeking to establish optimum sampling schemes for selected forest attributes with known accuracy and precision. In this context, a sampling scheme is a framework integrating specific sampling design, intensity and plot size. The approach was deductive, starting from the known situation (true population parameters) to generate scientific approximations (estimated population parameters) through a range of statistical procedures. It was hypothesized that sampling efficiency (accuracy and precision) for regeneration, species diversity and forest structure differed among individual sampling schemes across forest types, and varied with plot sizes and sampling intensities.

1.1 Review of Sampling Experiences and Efficiency in Natural Forests

Field studies through sampling are often combined with most commonly used remote sensing technologies to accelerate assessment of forest resources [3,10,11,12,13,14,15]. Commonly used field sampling techniques in

tropical forest ecosystems include walk trails, transects and plots to characterize tree species diversity, vegetation types, wildlife richness, forest structure and regeneration [13,16] as well as to study allometric relationships for modelling forest growth and yield including evaluation of site quality [17,18]. Vegetation sampling strategies in tropical forests are dictated and challenged by such factors as ragged terrain, abundant wildlife, expansiveness of the area and scarcity of baseline data e.g. checklists of indigenous species.

Different researchers in Kenya have used varied plot sizes, e.g. 20 m x 10 m [13,19], 10 m x 10 m [20]. In addition, sub-sampling using nested smaller plots within the large units is often applied in assessing forest regeneration and other plot features [12,21,22]. Saplings and seedlings are counted from different sub-plot sizes e.g. 40 m² and 20 m², respectively. The above sampling approach enables the collection of useful information on multiple attributes from forests in a short time. The collected plot-level data reveal actual state of forest conditions e.g. regeneration, recruitment, structure, diversity, disturbances [12,23,24,25,26,27,28]. Integrating use of aerial photographs and field sample plots along altitudinal changes provides data for the description of montane forest vegetation [e.g., 29]. In summary, a mix of different plot shapes, plot sizes and sampling intensities have been applied in different studies in forestry but at the subjective will of different reseachers and with no justification nor indication of any possible impact such mix would have on the reliability (accuracy

and precision) of the findings. Ecological and socioeconomic factors are increasingly becoming important in contemporary forestry in addition to forest biophysical attributes [30,31]. The emerging new demands dictate the need to develop tools to collect adequate data efficiently and generate required knowledge to guide sustainable management [22,32]. To capture quality data from natural forests, different tools and methods commonly used in forest inventory must be well combined [33] and planners and managers of forests and allied resources must have the ability to identify suitable methods to produce the needed data.

2. MATERIALS AND METHODS

2.1 Study Sites

Three selected sites in tropical natural forests of Kenya: Kakamega tropical rain forest (TRF) (34°54'3.078" - 34°54'6.318"N, 0°16'10.646" -0°16'13.882"E), Mount Elgon moist montane forest (MMF) (34°41'31.319" - 34°41'34.555"N, 0°52'2.65" - 0°52'5.887"E) and Loruk dry woodland forest (DWF) (36°00'3.539" - $36^{\circ}00'6.775$ "N, 0°42'36.884" - 0°42'40.121"E) were used to develop evaluation protocol for evaluation of sampling efficiency in complex forests. Fig. 1 shows studied forests and sites. These forests reflect environmental gradients (climatic, topographic and anthropogenic disturbance); from low rainfall dry vegetation zone to high rainfall humid zone and lower montane moist forest zone (Table 1).

Table 1. Location, elevation and climate characterising study sites in Kenya, 2019

Features		TRF – Kakamega forest site	MMF - Mt. Elgon forest site	DWF -Loruk Dry woodland Site	
i.	Mean rainfall (mm yr ⁻¹)	1971-2000	1460-1622	629	
ii.	Wettest month (mm)	January (61)	May (231).	May (92)	
iii.	Driest month (mm)	May (273)	January (41)	February (21)	
iv.	Altitude (m a.s.l.)	1580	2000-2060	987	
٧.	Mean annual temperature	20.4 °C	15.2–18.0°C	23.7°C	
vi.	Average warmest month	February (21.3°C)		March (24.8°C)	
vii.	Average coldest month	July (19.3°C)		August (22.5°C).	
viii.	Disturbance history	Moderate logging	Extensive Logging	Livestock grazing	
ix.	Climate type	Tropical Humid and warm	Temperate Moist and warm	Dry Tropical climate	

Sources: [12,25,34,35,36,37]. Weather data are averages between 1982 and 2012

2.2 Field Methods

2.2.1 Forest unit of reference

From inside each forest, a one-hectare (100 m x 100 m) forest unit was selected, at least 500 m from forest edge. It was referred to as forest unit of reference and represented the "studied populations" for different forest attributes of interest. Field data from these units were used as "controls" against which relative efficiency of each of the sampling schemes was compared and evaluated. The one-hectare unit was subdivided into smaller units during field data collection as illustrated in Fig. 2.

2.2.2 Field work organization

Data collection over 1-ha forest unit of reference was done in the field to determine "true" values of forest attributes. It was achieved by establishing 10 m x 10 m temporal field plots to be subdivided into four 5 m x 5 m subplots to ensure accurate field observations of forest attributes from seedling stage were made and recorded. Complete enumeration of forest attributes was carefully and systematically done in four hundred 5 m x 5 m smallest units of data compilation. To enhance accuracy observations on small sized individuals of the regeneration (seedlings), search and counts were done within 1mx1m-subplots, one after the other, within the 5mx5m-plot. Pre-prepared field data collection sheets were used and filled manually by trained field assistant. The labelling was done for each 5mx5m-plot with an identification number for easy retrieval (see illustration in Fig. 2). The largest plot size we tested in the sampling study was 20 m x 20 m. Each data entry was linked to a uniquely coded 5 m x 5 m plot. Data for plots larger than 5 m x 5 m were obtained through computer simulation using R Software by collapsing boundaries and merging adjacent smaller plots as applicable: from 5mx5m-plots, 5mx10m and 10mx10m-plots were formed. Merging adjacent 10mx10m-plots formed 20mx20m-plots. Merging of smaller plots was automatically associated with collating records they contained. Sums, averages and other computations were done for different plot sizes using R software modules. Similar data would otherwise be obtained in practice from field activity.

2.2.3 Sampling designs

Sampling design or method is the pattern of distribution of sampling units over the sampling

frame. Three basic designs were tested in each forest type: Simple random sampling (SRS), systematic sampling along vertical transect facing North – South direction (SSV), and systematic sampling along horizontal transect facing East – West direction (SSH). The number of plots sampled in each design varied depending on the plot size and sampling intensity (Table 2).

2.2.4 Sampling frame, sampling schemes designing and administration

The sampling frame was made of the sampling units i.e. plots in the one-hectare forest unit of reference. Population size (N) varied between 25 and 400 depending on the plot size: 400, 200, 100 and 25 units for 5 m x 5 m, 10 m x 5 m, 10 m x 10 m and 20 m x 20 m plot size, respectively. A scheme was defined by combination of three elements: sampling design. sampling intensity and plot size. Each scheme was applied and evaluated for efficiency (combining accuracy, precision and cost) on each forest type. Sampling was performed on each pupulation of selected attributes in the forest unit of reference, applying 48 simulated sampling schemes through R Software (Table 2). Real time data were collected from the field. Relative accuracy and efficiency of random and systematic sampling designs integrated with four plot sizes (25, 50, 100, 400 m²) and four intensities (5, 10, 20, 30%) were investigated with reference to full-cover one-hectare inventory in each studied forest type.

2.3 Assessed Forest Variables and Derived Attributes

Key attributes of interest included components of forest structure, composition and regeneration which are of high ecological, silvicultural and conservation significance [12,38,39]. Forest canopy height was measured to the nearest m from each 5mx5m-plot using suunto hypsometer [1,4]. Tree diameters at breast height [4,18] were measured using callipers to the nearest mm and cm for saplings and trees, respectively. Light screening efficiency in the forest was determined at the plot centre, using a 1m x 1m transparent polythene fixed on a wooden frame and subdivided in 100 square grid, [40,41]. A canopy gap unit was any space measuring 5 m x 5 m or more, devoid of tree canopy cover. Trees were identified to species level using dendrology documentation [e.g. 42], existing checklists [13, 36,41] or local parataxonomists. No material

was collected from the forests. Effort taken to complete inventory fieldwork within a plot was recorded in minutes [43], using a watch chronometer. For each 5mx5m-plot, tree seedling counts were done systematically and tallied progressively from 1mx1m-subplots. A

field team of 4-people (supervisor, skilled technical staff and two field assistants) was used. Field measurements and observations were later entered and organised in MS Excel 2010 and IBM SPSS Statistics version 21 before exporting and analysis in R version 3.4.4.

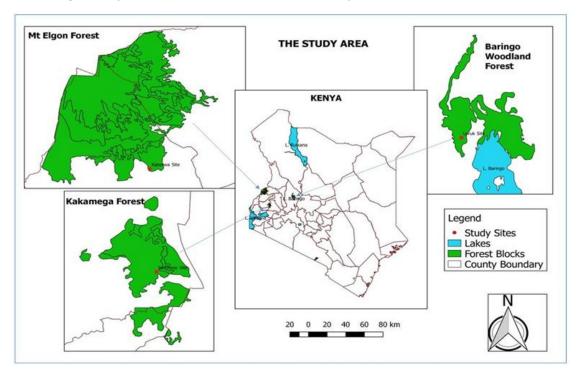


Fig. 1. Location of study sites in Kenya, 2019

Table 2. Sample sizes and distribution of sample plots among different sampling schemes, 2019

Sampling	Sampling	Plot sizes					
design	intensity (n /N %) ¹	5 m x 5 m (25 m ²)	10 m x 5 m (50 m ²)	10 m x10 m (100 m ²)	20 m x 20 m (400 m ²)		
SRS	5	20	10	5	1		
	10	40	20	10	2		
	20	80	40	20	5		
	30	120	60	30	7		
SSH	5	20	10	5	1		
	10	40	20	10	2		
	20	80	40	20	5		
	30	120	60	30	7		
SSV	5	20	10	5	1		
	10	40	20	10	2		
	20	80	40	20	5		
	30	120	60	30	7		

SRS = Simple random sampling; SSH = Systematic plot sampling along horizontal transect; SSV = Systematic plot sampling along vertical transect; n = sample size (no. of sample plots selected from one-hectare forest unit); N = population size (total number of plots in a one-hectare forest unit) A factorial combination of sampling design (3 levels), sampling intensity (4 levels) and plot sizes (4 levels) defined the 48 sampling schemes that were tested and compared for their efficiency

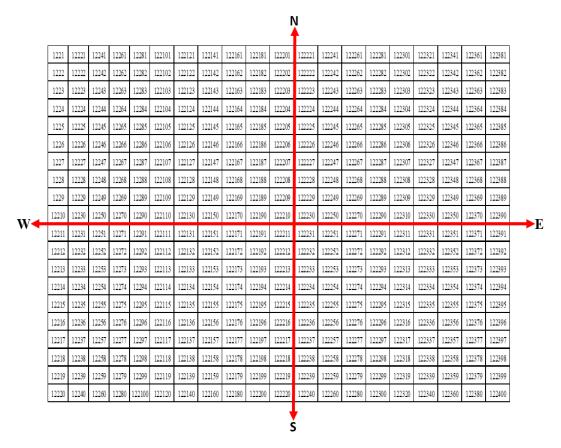


Fig. 2. Example of field arrangement for four hundred 5mx5m-subplots in the 100mx100m-forest unit (Horizontal: E-W; Vertical: N-S), 2019

Each cell with a number represent a coded 5mx5m-plot for easy data set identification, entry, storage, retrieval and use in sampling simulation activity. First three digits denote the forest site (122-Kakamega; 111-Mt Elgon; 131- Loruk). The subsequent digits represent serial plot number within the 100 m x 100 m frame

2.4 Data Analysis

Mean canopy height, % skylight through forest canopy, % forest 25m²-gaps, mean slope % [41], basal area derived from tree diameters, number of trees ha⁻¹, quadratic mean diameter from basal area [5,8,21], tree species richness and Shannon-Wiener diversity index [14,39, 41] were computed to characterize the study sites.

Inherent variability of the population of reference was measured by population mean variance for regeneration, trees and basal area ha⁻¹, based on different plot sizes (Eq. 1). The smallest mean variance for each attribute and forest type indicated a suitable plot size to be used in benchmarking efficiency of sampling schemes in terms of capturing inherent variability of studied populations.

Population mean variance =
$$\frac{\sigma^2}{N}$$
 (1)

where, σ^2 = population variance; N = Total number of plots per ha which varied with plot size.

Cost and precision of different sampling schemes were expressed on-per-hectare basis for forest attributes of interest. Sample variance and standard error of mean (SE) (Eq. 2) were computed before the calculation of sampling error % (Eq. 3) [3,44,45,46,47], also referred to as uncertainty level [6]. The smaller the uncertainty around the sample mean, the more precise the sampling scheme. Similarly, the smaller the uncertainty is around a population parameter estimate, the more accurate the inventory protocol. Any sampling scheme associated with uncertainty level less than 25% was considered to have acceptable precision and therefore was a promising scheme. Costefficiency of sampling schemes was measured based on the sampling effort. Efficiency level of a sampling scheme combined the cost factor,

uncertainty level and ability of the scheme to estimate inherent variability of the population of reference. Using forest regeneration as an example, relative efficiency of different sampling schemes was computed based on cost, precision and accuracy (Eq. 4). Ranking of sampling schemes in terms of efficiency was graphically displayed.

$$SE = {}^{S}/\sqrt{n}$$
 (2)

Where s = sample variance for the sampling scheme; <math>n = sample size

Sampling error % =uncertainty % =
$$\frac{SE \times t}{x} \times 100$$
 (3)

Where t = Student's t value obtained for each sample size from t-table with α = 0.05.

Efficiency % =
$$\frac{\sigma_1^2 \times \frac{C_t}{N_1}}{S_1^2 \times C_1/n_1} \times 100$$
 (4)

Where S_1^2 = sample variance for the sampling scheme:

 n_1 = sample size (no. plots); C_1 = hours spent on measuring variables (ie sampling effort or cost ha^{-1});

 σ_1^2 = population variance of reference for the variable of interest:

 C_t = actual total cost of measuring variables in one-hectare forest unit of reference;

 N_1 the population size (number of plots per ha, varying with plot size).

The screening of schemes led to the characterisation of sampling protocols that minimise sampling error to enhance accuracy [44]. A desired precision level (uncertainty %) was set to be \leq 25% which is adequate for inventories targeting multiple attributes, e.g. in tropical forests [44,47].

3. RESULTS AND DISCUSSION

3.1 Evaluating Efficiency of Sampling Schemes for Forest Structure Studies

3.1.1Biophysical characterization of reference forest populations

The forest populations of reference were characterised by environmental and biological attributes as shown below (Table 3). Tropical rainforest was distinctly the most complex and

dry woodland forest the simplest ecosystems. Efficiency levels of sampling schemes were compared for each assessed attribute and forest type.

3.1.2 Inherent variability of forest populations of reference

The 5mx5m plot size enables the measurement of variability for regeneration and trees in the three forest types (Table 5). Relative complexity of the forests based on this parameter was highest in the tropical rain forest and lowest in dry woodland forest. Assessment of inherent variability in basal area requires different plot sizes across forest types: largest (20mx20m) for MMF, 10mx10m for TRF and smallest (5mx5m) for DWF. It implies that large diameter trees are more scattered in Mt Elgon forest than in other forests, thus requiring larger plot size to capture inherent variability. Nested subplots (Fig. 3) can accommodate simultaneous assessment of regeneration, trees and basal area within 1hectare-forest unit, with each forest type having a distinct design as shown.

3.1.3 Cost and precision of different sampling schemes: Case of regeneration assessment

Fig. 4 shows that precision in assessing seedlings per hectare increased with decreasing plot size. The decrease in precision and accuracy of estimates as plot size increases followed similar linear patterns for MMF and DWF. The decrease in reliability of estimates as a result of increasing plot size was more prominent and higher in TRF than in the forest types. Sampling other two effort with decreasing increased plot (Fig. 5). With 100% sampling intensity, larger plot sizes led to cheaper inventory in each forest type.

Table 5 contains uncertainty and cost-efficiency associated with different sampling schemes for regeneration:

Most reliable sampling protocol in TRF was systematic sampling along transects facing north-south with 25 to 50 m² plot sizes, and 30% sampling intensity (95% CI uncertainty level < ± 25%). The cost of the larger plot was 50% lower. Therefore, SSV-5mx10 m-30% qualified as the most cost-efficient reliable sampling scheme.

Table 3. Biophysical characterization of forest populations of reference, 2019

Forest type	Height (m)	% skylight through canopy	% Forest gaps	Tree QMD	N trees ha ⁻¹	N Saplings ha ⁻¹	N Seedlings ha ⁻¹	Basal area (m ² h ⁻¹)	N tree species ha ⁻¹	Species diversity	Mean slope %
TRF	31	26	8.0	14	1,166	2,684	15,598	68.8	54	3.3	0.1
MMF	23	38	8.0	13	816	5,463	1,432	25.1	37	2.7	9.5
DWF	5	71	9.0	4	299	795	2,275	2.1	12	1.8	0.0

Key: QMD = Quadratic mean diameter in cm; Tree = individual with ≥5 cm Dbh; Sapling = individual with 1-5 cm Dbh; Seedling = individual < 1 cm Dbh; H' = Shannon Wiener index

Table 4. Population mean variance for selected forest attributes in complete inventory of a onehectare-forest unit of reference, 2019

Attribute	Forest type	Smallest $\sigma^2/_N$ (variability)	Invent	tory cost	Data compilation unit (m x m)	
			ha hr ⁻¹	Hrs ha ⁻¹	- , ,	
Seedlings ha ⁻¹	TRF	1,726,559.16	0.02	50	5x5	
-	MMF	223,003.91	0.02	50	5x5	
	DWF	3,033.49	0.04	25	5x5	
Stand density ha-1	TRF	5,239.46	0.02	50	5x5	
	MMF	2,848.56	0.02	50	5x5	
	DWF	2,427.01	0.04	25	5x5	
Basal area / ha	TRF	46.97	0.08	12.5	10x10	
	MMF	7.15	0.41	2.4	20x20	
	DWF	0.05	0.04	25	5x5	

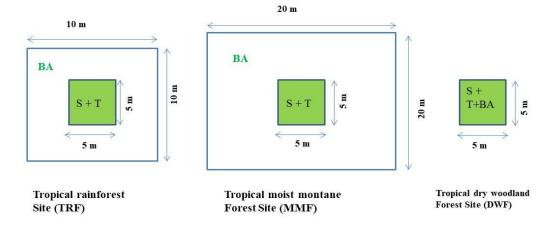


Fig. 3. Plot sizes and lay outs for simultaneous inventory of seedlings, trees and basal area in 1 ha – forest unit with minimization of inherent population variability as a controlling factor for each attribute: S = seedlings counts (< 1 cm dbh); T = trees counts (> 1 cm dbh); and BA = Basal area (m² ha⁻¹)] in Tropical rain forest, Moist montane forest and Dry woodland forest in Kenya

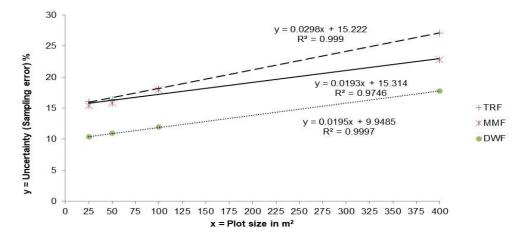


Fig. 4. Effect of plot size on precision level in forest inventory (e.g. seedlings at 100 % intensity)

Table 5. Forest inventory schemes for seedlings in selected natural forests, Kenya, 2019

Forest ype design Sampling (m²) Plot size (m²) Sampling intensity (%) Sampling hrs/lam ha/hr Sampling error (%) TRF SRS 25 100 50.42 0.02 15.36 TRF SRS 50 100 25.28 0.04 16.17 TRF SRS 100 100 12.47 0.08 18.40 TRF SSH (E-W) 50 5 26.00 0.04 22.51 TRF SSH (E-W) 50 100 50.42 0.02 15.36 TRF SSH (E-W) 50 100 50.42 0.02 15.36 TRF SSH (E-W) 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 50	Forest	Campling	Plot size	Compling intensity	Sampling offort		Campling arror
TRF SRS 50 100 25.28 0.04 16.17 TRF SRS 100 100 25.28 0.04 18.40 TRF SRS 100 100 12.47 0.08 18.40 TRF SSH (E-W) 50 5 26.00 0.04 22.51 TRF SSH (E-W) 50 100 50.42 0.02 15.36 TRF SSH (E-W) 50 100 52.28 0.04 16.17 TRF SSH (E-W) 50 100 12.47 0.08 18.40 TRF SSY (N-S) 25 30 50.89 0.02 20.92 TRF SSY (N-S) 25 30 50.89 0.02 20.92 TRF SSY (N-S) 50 30 50.89 0.02 20.92 TRF SSY (N-S) 50 30 25.17 0.04 23.53 TRF SSY (N-S) 50 100 50.42 0.02 15.36 TRF SSY (N-S) 50 30 40.68 0.02 14.74 MMF SRS 55 100 100 12.47 0.08 18.40 MMF SRS 50 100 50.42 0.02 15.36 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 100 12.47 0.08 18.40 MMF SRS 50 100 100 12.47 0.08 18.40 MMF SRS 50 100 40.68 0.02 14.74 MMF SRS 50 100 40.68 0.02 14.74 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 20.43 0.41 24.04 MMF SSY (N-S) 50 100 20.10 0.05 15.62 MMF SSY (N-S) 100 100 9.98 0.10 18.22 MMF SSY (N-S) 100 100 9.99 1.10 18.22 MMF SSY		Sampling design		Sampling intensity			
TRF SRS 50 100 100 125.28 0.04 16.17 TRF SRS 100 100 12.47 0.08 18.40 TRF SSH (E-W) 50 5 26.00 0.04 22.51 TRF SSH (E-W) 25 100 50.42 0.02 15.36 TRF SSH (E-W) 100 100 125.28 0.04 16.17 TRF SSH (E-W) 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 25 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 50 100 12.47 0.08 18.40 MMF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 100 100 100 100 100 100 100							
TRF SRS 100 100 12.47 0.08 18.40 TRF SSH (E-W) 50 5 26.00 0.04 22.51 TRF SSH (E-W) 25 100 50.42 0.02 15.36 TRF SSH (E-W) 50 100 25.28 0.04 16.17 TRF SSH (E-W) 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 100 12.47 0.08 18.40 MMF SRS 400 100 9.98 0.10 18.22 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 100 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 40.68 0.02 14.74 MMF SSY (N-S) 50 100 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSY (N-S) 100 100 9.98 0.10 18.22 MMF SSY (N-S) 100 100 9.98 0.10 10 18.22 MMF SSY (N-S) 100 100 9.98 0.10 18.22 MMF SSY (N-S) 100 100 9.98 0.10 18.22							
TRF SSH (E-W) 50 5 26.00 0.04 22.51 TRF SSH (E-W) 25 100 50.42 0.02 15.36 TRF SSH (E-W) 50 100 125.28 0.04 16.17 TRF SSH (E-W) 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 12.47 0.08 18.40 MMF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 40.68 0.02 14.74 MMF SRS 400 100 20.10 0.05 15.62 MMF SRS 400 100 2.43 0.41 24.04 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 100 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 24.3 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSY (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 0.05 15.62 MMF SSV (N-S) 50 100 50.00 20.10 50.05 15.62 MMF SSV (N-S) 50 100 50.00 5							
TRF SSH (E-W) 50 100 25.28 0.04 16.17 TRF SSH (E-W) 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 50.42 0.02 14.74 MMF SRS 50 100 50.42 0.02 14.74 MMF SRS 50 100 50.42 0.02 14.74 MMF SRS 50 100 100 12.47 0.08 18.40 MMF SRS 400 100 20.10 0.05 15.62 MMF SRS 100 100 9.98 0.10 18.22 MMF SRS 100 100 9.98 0.10 18.22 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 20.11 0.05 15.62 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 9.00 100 9.00 9.00 10.00 10.00 9.00 10.00 10.00 9.00 10.							
TRF SSH (E-W) 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 25 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 50 100 12.47 0.08 18.40 MMF SSV (N-S) 50 100 12.47 0.08 18.40 MMF SSS (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 400 100 9.98 0.10 18.22 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 400 100 24.43 0.41 24.04 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 30 21.83 0.41 24.04 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 25 100 11.35 0.09 10.67 DWF SRS 25 100 11.35 0.09 10.67 DWF SRS 50 0.00 11.35 0.09 10.67 DWF SRS 50 0.00 11.35 0.09 10.67 DWF SRS 50 0.00 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 50 0.00 11.35 0.09 10.67 DWF SSH (E-W) 25 20 22.28 0.04 9.87 DWF SSH (E-W) 25 20 22.28 0.04 9.87 DWF SSH (E-W) 25 20 22.28 0.04 9.87 DWF SSH (E-W) 25 30 22.28 0.04 9.87 DWF SSH (E-W) 25 20 22.28 0.00 5 18.76 DWF SSH (E-W) 25 20 22.28 0.00 5 18.76 DWF SSH (E-W) 25 30 22.20 0.05 18.76 DWF SSH (E-W) 25 400 100 11.35 0.09 10.67 DWF							
TRF SSH (E-W) 100 100 100 12.47 0.08 18.40 TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 55 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 400 100 9.98 0.10 18.22 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 55 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 10.0 9.98 0.10 18.22 MMF SSV (N-S) 400 100 1.17 0.86 - DWF SRS 50 20 21.75 0.05 24.40 DWF SRS 50 20 21.75 0.05 24.40 DWF SRS 50 20 21.75 0.05 11.83 DWF SRS 50 20 21.83 0.05 18.39 DWF SRS 100 100 11.35 0.09 10.67 DWF SRS 100 100 11.35 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 11.70 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 30 11.35 0.09 10.67 DWF SSH (E-W) 50 30 11.35 0.09 10.67 DWF SSH (E-W) 50 100 100 1.45 0.69 18.64 DWF SSH (E-W) 400 100 100 1.45 0.69 18.64							
TRF SSV (N-S) 25 30 50.89 0.02 20.92 TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 25 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 100 25.28 0.04 16.17 TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 100 100 9.98 0.10 18.22 MMF SRS 100 40.68 0.02 14.74 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 100 10.05 15.62 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 50 100 10.11 0.09 9.98 0.10 18.22 MMF SSV (N-S) 50 100 10.11 0.09 21.42 DWF SRS 25 30 21.75 0.05 24.40 DWF SRS 25 30 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 50 100 11.35 0.09 12.94 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 100 100 100 10.45 0.69 18.64 DWF SSH (E-W) 50 100 100 10.45 0.69 18.64 DWF SSH (E-W) 50 100 100 100 10.45 0.69 18.64 DWF SSH (E-W) 50 100 100 100 10.45 0.69 18.64 DWF SSH (E-W) 50 100 100 100 10.45 0.69 18.64							
TRF SSV (N-S) 50 30 25.17 0.04 23.53 TRF SSV (N-S) 25 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 400 100 2.43 0.41 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 9.98 0.10 18.20 MMF SSV (N-S) 400 100 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 21.09 DWF SRS 400 100 11.35 0.09 21.94 DWF SSH (E-W) 50 30 11.50 0.09 21.94 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 55 20 22.20 0.05 18.76 DWF SSH (E-W) 55 30 22.38 0.04 9.87 DWF SSH (E-W) 55 30 100 11.35 0.09 10.67 DWF SSH (E-W) 55 30 100 100 11.35 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 400 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 100 5.65 0.18 12.12							
TRF SSV (N-S) 25 100 50.42 0.02 15.36 TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 100 100 24.3 0.41 24.04 MMF SRS 400 100 24.3 0.41 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 40.68 0.02 14.74 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 24.3 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 30 100 20.10 0.05 15.62 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 21.83 0.05 18.39 DWF SRS 50 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 50 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 55 20 22.38 0.04 9.87 DWF SSH (E-W) 55 30 22.38 0.04 9.87 DWF SSH (E-W) 55 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 60 100 11.45 0.69 18.64 DWF SSH (E-W) 60 100 1.45 0.69 18.64 DWF SSH (E-W) 60 100 100 1.46 0.60 18.64							
TRF SSV (N-S) 50 100 25.28 0.04 16.17 TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 100 100 9.98 0.10 18.22 MMF SRS 400 100 2.43 0.41 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 50 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 400 100 24.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 50 20 21.75 0.05 24.40 DWF SRS 50 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 100 100 5.65 0.18 12.12 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 60 20 11.30 0.09 12.13 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 50 20 21.75 0.05 21.31 DWF SSH (E-W) 50 10 11.35 0.09 10.67 DWF SSH (E-W) 55 20 22.17 0.05 21.31 DWF SSH (E-W) 55 30 22.00 0.05 18.76 DWF SSH (E-W) 55 30 22.00 0.05 18.76 DWF SSH (E-W) 55 100 22.38 0.04 9.87 DWF SSH (E-W) 55 30 22.00 0.05 18.76 DWF SSH (E-W) 55 50 30 11.35 0.09 10.67 DWF SSH (E-W) 55 50 30 11.35 0.09 10.67 DWF SSH (E-W) 55 100 22.38 0.04 9.87 DWF SSH (E-W) 60 30 11.35 0.09 10.67							
TRF SSV (N-S) 100 100 12.47 0.08 18.40 MMF SRS 25 100 40.68 0.02 14.74 MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 100 100 9.98 0.10 18.22 MMF SRS 400 100 2.43 0.41 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 50 100 40.68 0.02 14.74 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 30 11.01 0.09 20.62 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 100 10.30 5.72 0.17 21.18 DWF SRS 25 100 10.31 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 21.09 DWF SRS 50 100 10.33 0.00 21.94 DWF SRS 60 100 11.35 0.09 21.94 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 30 11.50 0.09 10.67 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 50 100 11.45 0.69							
MMF SRS 50 100 40.68 0.02 14.74 MMF SRS 50 100 100 20.10 0.05 15.62 MMF SRS 400 100 9.98 0.10 18.22 MMF SRS 400 100 2.43 0.41 24.04 MMF SRS 400 100 40.68 0.02 14.74 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 50 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 20.10 0.05 15.62 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSS 50 100 11.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 100 30 5.72 0.17 21.18 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 11.35 0.09 10.67 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 30 11.35 0.09 10.67 DWF SSH (E-W) 50 30 11.35 0.09 10.67 DWF SSH (E-W) 50 30 11.35 0.09 10.67 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 30 100 11.35 0.09 10.67 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 50 50 50 50 50 50 50 50 50 50 50 50							
MMF SRS 50 100 20.10 0.05 15.62 MMF SRS 100 100 9.98 0.10 18.22 MMF SRS 400 100 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 20.10 0.05 15.62 MMF SSV (N-S) 400 100 2.17 0.05 24.40							
MMF SRS 100 100 9.98 0.10 18.22 MMF SRS 400 100 2.43 0.41 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 100 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 10 1.17 0.86 - DWF SRS 25 20 21.75 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>							
MMF SRS 400 100 2.43 0.41 24.04 MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 100 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 20.10 0.05 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 25 20 21.75 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
MMF SSH (E-W) 25 100 40.68 0.02 14.74 MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 50 30 11.11 0.09 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
MMF SSH (E-W) 50 100 20.10 0.05 15.62 MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 50 30 11.11 0.0							
MMF SSH (E-W) 100 100 9.98 0.10 18.22 MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 1.17 0.86 - DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09							
MMF SSH (E-W) 400 100 2.43 0.41 24.04 MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 25 20 11.00 0.09 21.42 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 100 30 5.72 0.17 21.18<		` ,					
MMF SSV (N-S) 25 100 40.68 0.02 14.74 MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 21.100 0.09 21.42 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 50 100 22.38 0.04 9.87 DWF SRS 400 100 11.35 0.09 10.67							
MMF SSV (N-S) 50 100 20.10 0.05 15.62 MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 1.45 0.69 18.64 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
MMF SSV (N-S) 100 100 9.98 0.10 18.22 MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 5.65 0.18 12.12 DWF SSH (E-W) 50 10 11.33 0.09 21.09 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
MMF SSV (N-S) 400 100 2.43 0.41 24.04 DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 <							
DWF SRS 400 10 1.17 0.86 - DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 400 100 5.65 0.18 12.12 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>							
DWF SRS 25 20 21.75 0.05 24.40 DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31							
DWF SRS 50 20 11.00 0.09 21.42 DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12							
DWF SRS 25 30 21.83 0.05 18.39 DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 100 11.35 0.09 10.							
DWF SRS 50 30 11.11 0.09 20.62 DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 50 100 11.35 0.09 <							
DWF SRS 100 30 5.72 0.17 21.18 DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09							
DWF SRS 25 100 22.38 0.04 9.87 DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
DWF SRS 50 100 11.35 0.09 10.67 DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>							
DWF SRS 100 100 5.65 0.18 12.12 DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00							
DWF SRS 400 100 1.45 0.69 18.64 DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 50 10 11.33 0.09 21.09 DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 25 20 22.17 0.05 21.31 DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 50 20 11.25 0.09 21.94 DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 25 30 22.00 0.05 18.76 DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 50 30 11.50 0.09 19.12 DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 25 100 22.38 0.04 9.87 DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 50 100 11.35 0.09 10.67 DWF SSH (E-W) 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 100 100 5.65 0.18 12.12 DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSH (E-W) 400 100 1.45 0.69 18.64 DWF SSV (N-S) 25 20 22.00 0.05 22.82							
DWF SSV (N-S) 25 20 22.00 0.05 22.82							
211. 331 (113) 33 25 10.00 0.00 24.00							
DWF SSV (N-S) 25 30 21.89 0.05 17.97							
DWF SSV (N-S) 50 30 10.89 0.09 18.39							
DWF SSV (N-S) 100 30 5.44 0.18 19.76							
DWF SSV (N-S) 400 30 1.28 0.78 19.73							
DWF SSV (N-S) 25 100 22.38 0.04 9.87							
DWF SSV (N-S) 50 100 22:38 0.04 9.07 DWF SSV (N-S) 50 100 11.35 0.09 10.67							
DWF SSV (N-S) 100 100 5.65 0.18 12.12							
DWF SSV (N-S) 400 100 1.45 0.69 18.64							

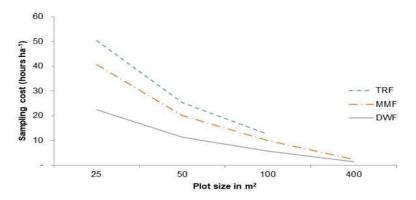


Fig. 5. Relationship between sampling effort and plot size with complete forest inventory of number of seedlings ha⁻¹ in different forest types (Tropical rainforest –TRF, Moist montane forest – MMF and Dry woodland forest – DWF)

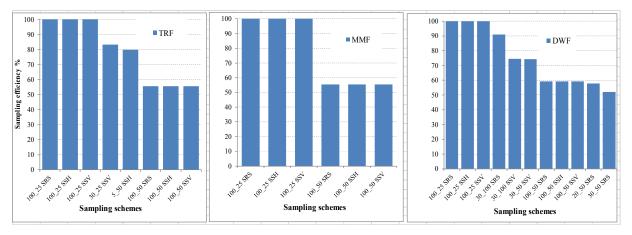


Fig. 6. Relative efficiencies (cost, precision and accuracy combined) of candidate sampling schemes in assessing forest regeneration (no. seedlings ha⁻¹) in tropical rain forest (TRF), moist montane forest (MMF) and dry woodland forest (DWF), Kenya, 2019

Key: SRS = Simple random sampling; SSH = Systematic plot sampling along horizontal transect; SSV = Systematic plot sampling along vertical transect; Sampling scheme

e.g. "100_25_SRS" implies 100 % intensity, 25 m² plot size, SRS design

- In the dry woodland forest, sub-sampling one hectare unit can use either random or systematic sampling (95% CI uncertainty of ± 15% to ± 25%). However, SSV/SSH-5mx10m-30% would be the most preferred over random sampling due to practical field advantages associated with systematic sampling [2].
- In MMF, to achieve uncertainty of <25% requires complete inventory (100% intensity). The most reliable and costefficient sampling protocol for seedlings is using 100m x 100m forest plot subdivided into 100 10mx10m-subplots. Sub-plot size influences cost and uncertainty .The 20 mx20 m sub-plot appears cheapest but the 10mx10m one strikes the best balance between precision and cost.

3.1.4 Relative efficiency of different sampling schemes based on cost, precision and accuracy: Case of regeneration assessment

Fig. 6 indicates that systematic counting of seedlings in 5mx5m-plot size with 30% intensity (SSV-5mx5m-30%) was the most efficient scheme in TRF with 83% efficiency; SSH-5mx10m-5% had 80% efficiency. In DWF, most efficient schemes were SRS-10mx10m-30% (91% efficiency), SSV-10mx10m-30% (75%) and SSV-5mx10m- 30% (74%). For MMF, all evaluated sampling schemes with intensity < 100% had efficiency <50%. Seedling surveys would be best carried out over 1-ha-plot, subdivided into 5mx5m sub-plots with 100% intensity.

4. CONCLUSION

This study demonstrated the practical aspect of screening simulated sampling schemes to develop reliable and cost-efficient inventory protocols in tropical forestry. It was possible to determine optimum plot sizes, sampling intensities and sampling designs that give the best balance between sampling error (as a measure of precision and/or accuracy) and sampling effort (as a measure of cost). Based on the attributes of the defined population of reference, it was possible to compute and illustrate relative efficiency of promising sampling schemes. Established efficient sampling schemes for tree regeneration were: SSH-5mx10m-5% for tropical rain forest, SSV/SSH-

5mx5m-100% for moist montane forest and SSV-10mx10m / 5mx10m-30% for dry woodland forest in Kenya. Evaluation of possibilities to subsample one hectare area or not, applicable sampling schemes based on random or systematic sampling designs was achieved for the selected tropical natural forests with different levels of complexity, and using the most vulnerable stage of forest development (seedling stage). One-hectare-forest inventory method found inevitable for regeneration assessment in montane forest where all evaluated sampling schemes with intensity <100% per hectare were not efficient enough (efficiency <50%) perhaps due to the slope factor. Same factor seems to influence sampling protocol for basal area than the complexity of forest ecosystem per se.

ACKNOWLEDGEMENTS

Authors acknowledge African Forest Research Network for funding the project, under which field work was undertaken under Prof J. Ole Kiyiapi of Kenya and Prof Eric Eboh of Nigeria who were the project leaders. We thank field teams and local leaders in Kakamega, Mt Elgon and Loruk in Baringo as well as Michael Maina and Sheila Aswani for GIS expertise offered and the Data Analyst using R-Software Jean Victor Kwizera.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Schreuder HT, Gregoire TG, Wood GB. Sampling methods for multiresource forest inventory. John Wiley & Sons, Inc., New York; 1993.
- Freese F. Elementary forest sampling. Agriculture Handbook no. 232. Oregon: US Department of Agriculture, Forest Service; 1989.
- Lackmann S. Good practice in designing a forest inventory. Lesson 8. Regional Workshop: Capacity Development for Sustainable National Greenhouse Gas Inventories – AFOLU sector (CD-REDD II) Programme, Quito, Ecuador; 2011.
- Avery TE, Burkhart HE. Forest Measurements, 5th Ed. Illinois: Waveland Press; 2015.

- Alder D, Synnott TJ. Permanent sample plot techniques for mixed tropical forest. Tropical Forestry Papers, Commonwealth Forestry Institute, University of Oxford. 1992:25.
- 6. Gerwing JJ, Schnitzer SA, Burnham RJ, Bongers F, Chave J, DeWalt SJ, et al. Standard Protocol for Liana Censuses. Biotropica. 2006;38(2):256–261.
- 7. Synnott TJ. A manual of permanent plot procedures for tropical rainforests. Tropical Forestry Papers. Commonwealth Forestry Institute, University of Oxford. 1979;14.
- 8. Gebreselasse AG. Plant Communities, Species Diversity, Seedling Bank and Resprouting in Nandi Forests, Kenya. Unpublished PhD Thesis, University of Koblenz-Landau; 2011.
- Lee HS, Davies SJ, LaFrankie JV, Tan S, Yamakura T, Itoh A, et al. Floristic and structural diversity of mixed dipterocarp forest in Lambir Hills National Park, Sarawak, Malaysia. Journal of Tropical Forest Science. 2002;14(3):379-400.
- Nilson M, Folving S, Kennedy P, Puumalainan J, Chirici G, Corona P, et al. Combining remote sensing and field data for deriving unbiased estimates of forest parameter over large regions. In, Corana, P., Kohl, M., & Marchetti, M. (Eds). Advances in Forest Inventory for sustainable Forest Management and Biodiversity Conservation; 2003.
- 11. Asthana DK, Asthana M. Environment: problems and solutions. Ramnagar, New Dheli: S. Chand and Company Ltd; 1998.
- Hitimana J, Kiyiapi J, Njunge J. Forest structure characteristics in disturbed and undisturbed sites of Mt Elgon moist lower montane forest, western Kenya. Forest Ecology and Management. 2004;194:269-291.
- Hitimana J, Kiyiapi J, Kisioh H, Warinwa F, Lenaiyasa P, Mayienda R, et al. Participatory ecological assessment of Kirisia forest reserve, Samburu, Kenya. AWF Technical Paper Series, Nairobi: African Wildlife Foundation; 2009.
- 14. Ucar Z, Bettinger P, Merry K, Siry J, Bowker JM, Andakbuluta R. A comparison of two sampling approaches for assessing the urban forest canopy cover from aerial photography. Urban Forestry & Urban Greening. 2016;16:221–230.

- Nowak DJ, Crane DE, Stevens JC, Hoehn RE, Walton JT, Bond J. A ground-based method of assessing urban forest structure and ecosystem services. Arboric. Urban For. 2008;34:347–358.
- Mutiso FM, Cheboiwo J, Kiyiapi JL, Sang FK, Hitimana J. Comparative Study of Sampling Methods for Efficient Diagnosis of Health Status of Selected Natural Forest Ecosystems in Kenya. Journal of Natural Sciences Research. 2016;5(2).
- Weiskittel AR, Hann DW, Kershaw Jr, JA, Vanclay J. Forest growth and yield modeling. Wiley-Blackwell, Oxford, UK; 2011.
- 18. Burkhart HE, Tome M. Modeling forest trees and stands. Springer Science, London; 2012.
- 19. Warinwa F, Mwaura F, Kiringe JW, Ndubi AO. Land Cover Dynamics in the Kirisia Forest Ecosystem, Samburu County, Kenya. Advances in Remote Sensing. 2016;5:168-182.
- Ronoh DK. Anthropogenic disturbance indicators and population structure of Zanthoxylum gillettii (De Wild Waterman) and Prunus Africana (Hook. f.) Kalkman in South West Mau Forest, Kenya. Unpublished master's thesis, University of Kabianga; 2016.
- 21. Ronoh DK, Sirmah PK, Hitimana J, Mullah CJA. Variation in Regeneration Density and Population Structure of *Prunus africana* Across Human Disturbance Gradient in South West Mau Forest, Kenya. International Journal of Natural Resource Ecology and Management. 2018;3(1):1-8.
- Kiruki HM, van der Zanden EH, Gikuma-Njuru P, Verburg PH. The effect of charcoal production and other land uses on diversity, structure and regeneration of woodlands in a semi-arid area in Kenya. Forest Ecology and Management. 2017; 391:282-295.
- Clausnitzer V, Churchfield S, Hutterer R. Habitat occurrence and feeding ecology of Crocidura montis and Lophuromys flavopunctatus on Mt. Elgon, Uganda. African Journal of Ecology. 2003;41(1):1–8.
- 24. Bulafu CE, Mucunguzi P, Kakudidi EK. Diversity and distribution of wild terrestrial orchids of Mt Elgon Forest National Park,

- eastern Uganda. African Journal of Ecology. 2007;45 (3):21–28.
- Hitimana J, Kiyiapi J, Njunge J, Bargerei R. Disturbance indicators and population decline of logged species in Mt Elgon Forest, Kenya. African Journal of Ecology. 2010;48:699-708.
- 26. Hitimana J, Kiyiapi JL, Kibugi PW, Kisioh H, Mayienda R, Warinwa F, et al. Challenges of linking socio-economic significance and conservation value of forests In Drylands of Kenya: Case study of Kirisia Forest Samburu pastoralists coexistence. In: Grillo, O. & Venora, G. (Eds). Biological Diversity and Sustainable Resource Use. Intech. Chapter 2011;11-34.
- Kiringe JW, Mwaura F, Warinwa F. Characterization of Water Source Types and Uses in Kirisia Forest Watershed, Samburu County, Kenya. Environment and Natural Resources Research. 2016;6(3).
- Reed MS, Cokie MRJ. Effects of grazing and cultivation on forest plant communities in Mount Elgon National Park, Uganda. African Journal of Ecology. 2000;38(2): 154–162.
- Hamilton AC, Perrott RA. A study of altitudinal zonation in the Montane Forest Belt of Mt. Elgon, East Africa. Vegetatio. 1981;45:107-125.
- Vanclay JK. Realizing opportunities in forest growth modelling. Canadian Journal of Forest Research. 2003;33:536 – 541.
- 31. Pretzsch H. Forest dynamics, growth and yield, from measurement to model. Springer-Verlag, Berlin; 2010.
- 32. Nacoulma BMI, Schumann K, Traore S, Bernhardt-Roermann M, Hahn K, Wittig R, et al. Impacts of land-use on West African Savanna vegetation: a comparison between protected and communal area in Burkina Faso. Biodiversity Conservation. 2011;20:3341-3362.
- 33. Bellefontaine R, Petit S, Pain-Orcet M, Deleporte P, Bertault J. Trees outside forests: Towards better awareness. FAO Conservation guide 35, Rome; 2002.
- 34. Fashing P, Forrestel A, Scully C, Cords M. Long-term tree population dynamics and their implications for the conservation of the Kakamega forest, Kenya. Biodiversity and Conservation. 2003;13:753–771.

- 35. Joetzoald R, Schmidt H. Farm Management Handbook of Kenya, West Kenya. II/A. 1983;309–324.
- Kokwaro J. Conservation status of the Kakamega forest in Kenya: The easternmost relic of the equatorial rain forest of Africa. Monographs in Systematic Botany Missouri Botanocal Garden. 1988; 25:471–489.
- 37. Mutiso FM, Hitimana J, Kiyiapi JL, Sang FK, Eboh E. Recovery of Kakamega tropical rainforest from anthropogenic disturbances. Journal of Tropical Forest Science. 2013;25(4):566–576.
- 38. Feld CK, da Silva PM, Sousa JP, de Bello F, Bugter R, Grandin U, et al. Indicators of biodiversity and ecosystem services: A Synthesis across Ecosystems and Spatial Scales; 2009.
- 39. Hamilton AJ. Species diversity or biodiversity? Journal of Environmental Management. 2005;75:89–92.
- Brower JE, Zar JH, Von Ende. Field and Laboratory Methods for General Ecology, 4th Ed. Boston, Mass: WCB McGraw-Hill; 1998.
- 41. Hitimana J. Structure, Composition and Regeneration of Mt Elgon Moist Lower Montane Forest (Kenya) with Particular Interest in Olea capensis subsp. welwitschii. M.Phil. Thesis, Moi University; 2000.
- 42. Beentje HJ. Kenya Trees, Shrubs and Lianas. Nairobi: National Museums of Kenya; 1994.
- 43. Muchiri MN, Ngugi J, Kinyanjui M, Balozi K, Ojuang F, Nduati P, et al. Improving Capacity in Forest Resources Assessment in Kenya (IC-FRA): Field Manual for Biophysical Forest Resources Assessment in Kenya. KEFRI, Muguga; 2016.
- 44. Klauberg C, Vidal E, Silva CA, de M, Bentes M, Hudak AT. Sampling methods for titica vine (*Heteropsis* spp.) inventory in a tropical forest. Annals of Forest Science. 2016;73:757–764.
- 45. Morais R, Sheuber M. Statistical precision phytosociological surveys. In: Proceedings of the International Symposium on Assessment and Monitoring of Forests in Tropical Dry Regions with special reference to Gallery Forests. Brasilia. 1996-1997;135-147.
- Wong JLG, Thornber K, Baker N. Resource assessment of non-wood forest

products: experience and biometric principles. FAO, Rome; 2001.

47. Cavalcanti FJB, Machado AS, Osokawa RT, Cunha US. Comparison of the estimated values by sampling in the

characterization of the structure of a forest area in the Amazon with the information recorded in forest census. *Revista* Árvore. 2011;35:1061–1068.

© 2019 Hitimana et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (http://creativecommons.org/licenses/by/4.0), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
http://www.sdiarticle3.com/review-history/50478